

AC Hand Pallet Trucks

รถยกกลากพาเลท

World number 1 for 7 years running!

- Durable & proven ergonomic handle.
- Fail-proof, self-contained pump with a special German sealing system.
- Superior pump design for lifting heavy loads with minimum effort.
- Specially designed C-frame forks provide for additional structural integrity.
- Quality certified as fit for sale in Germany and the European Union.
- Galvanized housing, sturdy construction with hard chromium plated piston and overload protection.
- 'Anti-Impact' feature lowers fully loaded trucks gently even when release valve lever is completely squeezed.



- Excellent galvanized whole casting hydraulic pump, robust and durable, with fine control of lowering speed and overload valve, low routine maintenance.



- Lower Position --- to lower load, pull up on the finger tip control.
- Neutral Position-to place finger tip control in this position during pulling the truck or load.
- Lift Position-to raise load, push down on finger tip control, pump handle to raise the load.



- Option of different coating material for both steering wheel and fork rollers.
- Polyurethane --- Ideal for delicate floors with hard wearing and non-marking properties – quiet and durable.
- Nylon --- low drag efforts, high resistance to chemicals, non-marking–preferred in food, fishing and chemical industries with smooth level floors.




- Ergonomically designed handle with comfortable rubber grip allows optimized safety as well as comfort. Three position operational handle lever for lifting, transporting and lowering purposes.



* Standard in Thailand
* Standard in Indonesia for 3 ton models.

* Standard in Malaysia
* Standard in Indonesia for 2.5 ton models.

- Additional entry and exit forkrollers guarantees for maximum stability and safety for transporting goods on slopes.

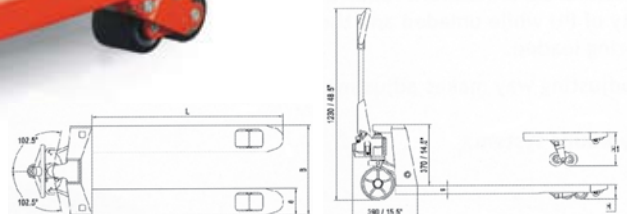

Model รุ่น		AC2500EN	AC2500NS	AC2500N	AC2500W	AC3000N	AC3000W
Capacity น้ำหนักบรรทุก	kg	2500			3000		
Overall Forks Width (W) ความกว้างงายกทั้งหมด	mm	450	520	520	685	520	685
Fork Length (L) ความยาวงายก	mm	1150	800	1150	1220	1150	1220
Fork Width (N) ความกว้างงายก	mm	160					
Min. Fork Height (S) ความสูงขั้นต่ำงายก	mm	75* / 85					
Max. Fork Height (H) ความสูงสูงสุดงายก	mm	200					
Steering Wheel ล้อบังคับเลี้ยว	mm	OD 180 x 50W					
Load Wheel ล้อบรรทุกน้ำหนัก	mm	OD 74 x 70W / 82 x 93W					

Polyurethane wheels as standard, nylon wheels available unless otherwise specified.
*75mm lowered height applies to Thailand only.
Specifications subject to change at our discretion.