

FPS12X-L/FPS16X-L/FPS20X-L

Electric Pedestrian Stacker with capacities of 1200/1600/2000kg. PSxxDL series with initial lift available.

INTRODUCTION

The FPS 12-20X-L series is tailored towards pedestrian controlled stacking operations with capacities from 1200kg up to 2000kg.

With the mounted long tiller the operator can keep a safe and ergonomic distance while performing his work.

Due to the gentle full proportional lift system, stacking operations becomes safer and faster.

With high quality and state of the art top brand components and technology, the truck competes with other leading brands in the market.

- Safe, Compact and Ergonomic Long Tiller Design.
- Precise Lifting and Lowering with Fully Proportional Hydraulic System.
- Powerful, Maintenance Free German AC Power Train.
- Core Components from Top Quality Brands.
- 4 Wheel Structure for Stability.

FPS16X-I



Long tiller design for ergonomics and safety

With the long tiller design the operator can always keep a safe distance from the truck while working ergonomically.

This design requires less operational forces than trucks with a short tiller. The tiller's operating height is naturally installed to be ergonomic, giving the operator friendly control positions. Stacking operations become quicker and more ergonomic due to safe distancing and a better view of the forks.

The 4 wheel design with the sideways mounted long tiller gives an exact and perfect view to the forks.

Top brand qualified components

Using high quality core components:

- Reliable multifunctional REMA tiller with ergonomic contactless rocker switches.
- Top quality Schabmueller AC drive motor.
- Kordel gearbox.
- HPI hydraulic power pack.
- Zapi controller.
- Intorque brake.
- Wicke drive wheel.

The parts used reduces high service costs and comes with the performance and reliability which is required for demanding stacking operations.



Electric Stacker



Electric proportional lifting and lowering

The electronically controlled proportional lifting system ensures accurate positioning and stacking operations at every lifting height.

In specific with high masts the electronic controlled proportional lifting performs at its best.

CAN-BUS

CANBUS technology

The CANBUS technology is due to less wiring with more reliability.


For maintenance the CANBUS technology make analyzed and adjustments easier so that the downtime is lower than for trucks without CANBUS.

Digital signals further makes parts longer lasting than analogue signals.





3

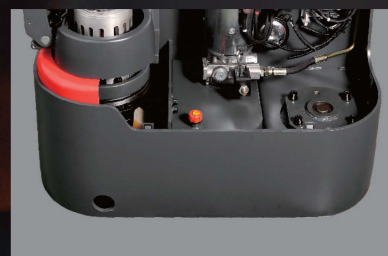

Robust and Reliable Design

The robust chassis with strong 8mm thick apron protects the truck and the components against mechanical impacts from the environment.

In combination with the metal battery cover, the truck is well equipped to reduce maintenance work and damages to a minimum.

Dirty floor environments have less influence on the vertical AC motor design as the components and the brakes are out of reach to direct impacts.


IP 54 protected controller, safe against dust and water splashes.



German AC drive technology

The powerful maintenance free German Schabmueller AC Drive motor with German Kordel gearbox, Intorqe brake and Wicke drive wheel all together gives the best performance, efficiency and reliability, this top brand combination reduces the overall operating cost!

Whether smooth or sudden acceleration is required, the AC Drive always give the right and direct response.

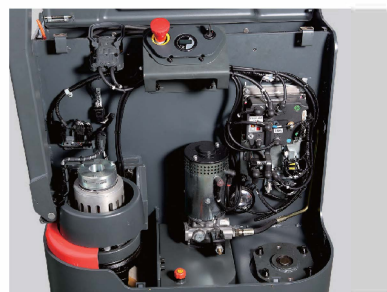

Maintenance friendly

The trucks' design and the components used are tailored to make service and maintenance easy. All components are easy to reach after removing the main cover with only two screws.

The drive wheel and the castor wheel are easy to exchange without craning the truck.



For every application the right battery capacity

With the FPS X-L series every truck comes with the right battery:

- FPS12X-L with 180 Ah 2VBS battery for light duty models, good maneuverability for restricted areas.
- FPS16X-L with 270 Ah 3VBS battery
- FPS20X-L with 350 AH DIN 3PzS battery for long operations and multi- shifts.

Optional sideway battery exchange compartment for FPS20X-L with 210 Ah battery.

Optionals

- Various mast versions
- Load backrest
- Sideway battery exchange for FPS16X-L and FPS 20X-L





Electric Stacker

FPS20X-L

Masttable FPS12X-L/FPS16X-L/FPS20X-L

Designation	Lowered mast height h_1 (mm)	Free lift height h_2 (mm)	Lift height h_3 (mm)	Extended mast height h_4 (mm)	Lift+fork height h_3+h_{13} (mm)
FPS12X-L					
Two-stage mast	1958	—	2830	3380	2920
	2108	—	3130	3680	3220
	2308	—	3530	4080	3620
Two-stage mast FFL (Full-Free-Lift)	1958	1410	2830	3380	2920
	2108	1560	3130	3680	3220
	2308	1760	3530	4080	3620
Three-stage mast FFL (Full-Free-FFL)	1998	1320	3930	4480	4020
	2008	1420	4230	4780	4320
	2108	1520	4530	5080	4620
FPS16X-L					
Two-stage mast	1985	—	2830	3380	2920
	2108	—	3130	3680	3220
	2308	—	3530	4080	3620
Two-stage mast FFL (Full-Free-Lift)	1958	1410	2830	3380	2920
	2108	1560	3130	3680	3220
	2308	1760	3530	4080	3620
Three-stage mast	2008	—	4230	4780	4320
	2108	—	4530	5080	4620
Three-stage mast FFL (Full-Free-FFL)	1708	1120	3330	3880	3420
	1908	1320	3930	4480	4020
	2008	1420	4230	4780	4320
	2108	1520	4530	5080	4620
	2343	1756	5230	5780	5320
	2408	1820	5430	5980	5520
FPS20X-L					
Two-stage mast	2078	—	2830	3500	2920
	2228	—	3130	3800	3220
	2428	—	3530	4200	3620
Two-stage mast FFL (Full-Free-Lift)	1978	1310	2630	3300	2720
	2078	1410	2830	3500	2920
	2228	1560	3130	3800	3220
	2428	1760	3530	4200	3620
Three-stage mast	2128	—	4230	4900	4320
	2228	—	4530	5200	4620
Three-stage mast FFL (Full-Free-FFL)	1978	1310	3930	4600	4020
	2128	1420	4230	4900	4320
	2228	1520	4530	5200	4620

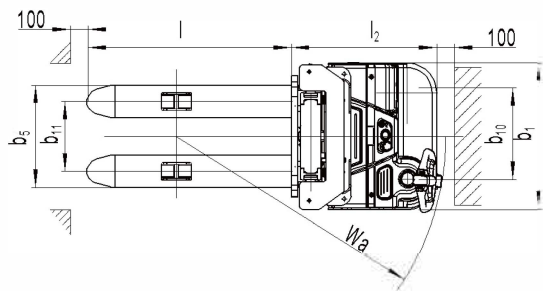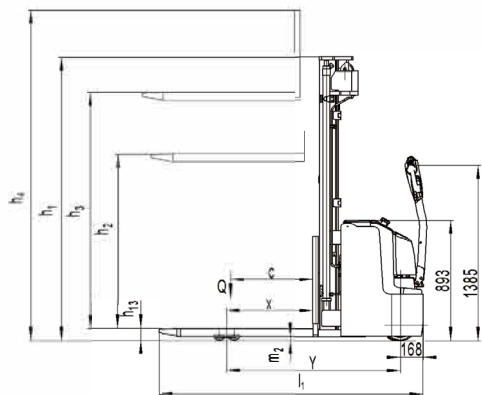


Type sheet for industrial truck acc. to VDI 2198 1KG=2.2LB 1INCH=25.4MM

Distinguishing mark	1.2 Manufacturer's type designation 1.3 Power (battery ,diesel, petrol, gas, manual) 1.4 Operator type 1.5 Load Capacity / rated load 1.6 Load centre distance 1.8 Load distance ,centre of drive axle to fork 1.9 Wheelbase	Q (t) c (mm) x (mm) y (mm)	FPS12X-L(3600)	FPS12X-L(4600)	FPS1X-6L(4600)	FPS20X-L(4600)
			Battery Pedestrian			
Weight	2.1 Service weight	kg	1007	1150	1340	1579
	2.2 Axle loading, laden front/rear	kg	684/1523	735/1610	930/2010	1000/2579
	2.3 Axle loading, unladen front/rear	kg	610/397	720/430	850/490	900/679
Tires, chassis	3.1 Tires		Polyurethane(PU)			
	3.2 Tire size,front	Φxw (mm)	Φ230×70			
	3.3 Tire size,rear	Φxw (mm)	Φ84×70			
	3.4 Additional wheels(dimensions)	Φxw (mm)	Φ150x54			
	3.5 Wheels,number front/rear(x=driven wheels)		1x +1/4			
	3.6 Tread, front	b ₁₀ (mm)	522			
	3.7 Tread, rear	b ₁₁ (mm)	390/505			
Dimensions	4.2 Lowered mast height	h ₁ (mm)	2308	2108	2108	2228
	4.3 Free Lift height	h ₂ (mm)	1760	1520	1520	1520
	4.4 Lift height	h ₃ (mm)	3530	4530	4530	4530
	4.5 Extended maximal height	h ₄ (mm)	4088	5088	5088	5208
	4.9 Height of tiller in drive position min./ max.	h ₁₄ (mm)	850/1385			
	4.15 Height, lowered	h ₁₃ (mm)	90			
	4.19 Overall length	l ₁ (mm)	1919	1929	1964	2100
	4.20 Length to face of forks	l ₂ (mm)	769	779	814	950
	4.21 Overall width	b ₁ (mm)	820			
	4.22 Fork dimensions	s/e/l (mm)	60/180/1150			
	4.25 Distance between fork-arms	b ₅ (mm)	570/685			
	4.32 Ground clearance, centre of wheelbase	m ₂ (mm)	28		28	23
	4.33 Aisle width for pallets 1000X1200 crossways	Ast (mm)	2336		2406	2536
	4.34 Aisle width for pallets 800X1200 lengthways	Ast (mm)	2323		2393	2523
	4.35 Turning radius	Wa (mm)	1400		1510	1640
Performance data	5.1 Travel speed, laden/ unladen	km/h	6.0/6.0		5.7/6.0	5.4/6.0
	5.2 Lift speed, laden/ unladen	m/s	0.09/0.14	0.13/0.20	0.13/0.20	
	5.3 Lowering speed, laden/ unladen	m/s	0.25/0.20	0.28/0.23	0.28/0.23	
	5.8 Max. gradeability, laden/ unladen	%	6/12		6/12	6/10
	5.10 Service brake		Electromagnetic			
Electric- engine	6.1 Drive motor rating S2 60min	kW	1.3		1.3	1.7
	6.2 Lift motor rating at S3 4.5%	kW	1.5	3.2	3.2	3.2
	6.3 Battery acc. to DIN 43531/35/36 A, B, C, no		2VBS		3VBS	3PZS
	6.4 Battery voltage, nominal capacity K5	V / Ah	24/180		24/270	24/350
	6.5 Battery weight +/-5%	kg	175		230	288
	6.6 Energy consumption acc: to VDI cycle	kWh/h	0.95		1.59	1.70
Additional data	8.1 Type of drive control		AC-Speed Control			
	8.4 Sound level at driver's ear acc. to EN 12053	dB(A)	<70			

Masttable FPS12X-L/FPS16X-L/FPS20X-L

Designation	Lowered mast height h_1 (mm)	Free lift height h_2 (mm)	Lift height h_3 (mm)	Extended mast height h_4 (mm)	Lift+fork height h_3+h_{13} (mm)
FPS12X-L					
Two-stage mast	1958	—	2830	3380	2920
	2108	—	3130	3680	3220
	2308	—	3530	4080	3620
Two-stage mast FFL (Full-Free-Lift)	1958	1410	2830	3380	2920
	2108	1560	3130	3680	3220
	2308	1760	3530	4080	3620
FPS16X-L					
Two-stage mast	1985	—	2830	3380	2920
	2108	—	3130	3680	3220
	2308	—	3530	4080	3620
Two-stage mast FFL (Full-Free-Lift)	1958	1410	2830	3380	2920
	2108	1560	3130	3680	3220
	2308	1760	3530	4080	3620
Three-stage mast	1408	—	2430	2980	2520
	2008	—	4230	4780	4320
	2108	1756	4530	5080	4620
Three-stage mast FFL (Full-Free-FFL)	1708	1120	3330	3880	3420
	1908	1320	3930	4480	4020
	2008	1420	4230	4780	4320
2108	1520	4530	5080	4620	

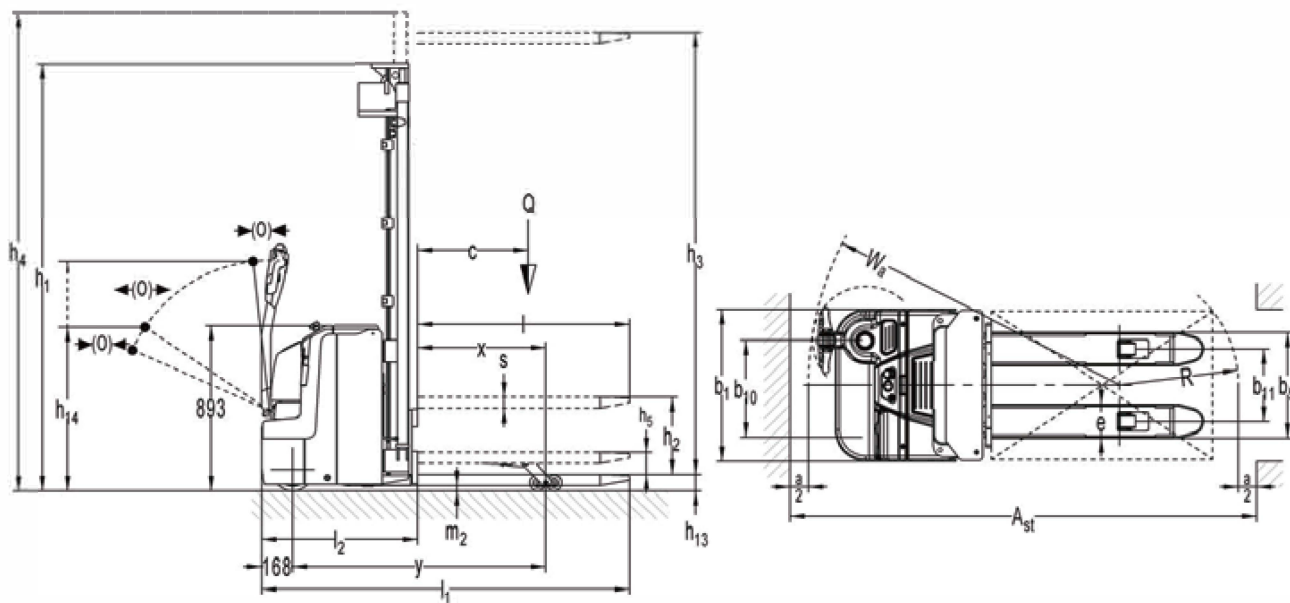

Type sheet for industrial truck acc. to VDI 2198 1KG=2.2LB 1INCH=25.4MM

Distinguishing mark	1.2	Manufacturer's type designation		FPS 12X-L 3600	FPS 16X-L 4600FFL
	1.3	Power (battery ,diesel, petrol, gas, manual)		Battery	
	1.4	Operator type		Pedestrian	
	1.5	Load Capacity / rated load		1.2 ¹⁾	1.6 ¹⁾
		Load capacity at mast lift	Q (t)	1.2	1.6
	1.6	Load capacity at support arm lift		2.0	2.0
		Load centre distance	c (mm)		600
	1.8	Load distance ,centre of drive axle to fork	x (mm)		695 ¹⁾
	1.9	Wheelbase	y (mm)	1374 ²⁾	1417 ²⁾
Weight	2.1	Service weight	kg	1070	1380
	2.2	Axle loading, laden front/rear	kg	870/2200	1130/2250
	2.3	Axle loading, unladen front/rear	kg	730/340	945/435
Tires, chassis	3.1	Tires		Polyurethane (PU)	
	3.2	Tire size, front	Φxw (mm)	Φ230×70	
	3.3	Tire size, rear	Φxw (mm)	Φ84×70	
	3.4	Additional wheels(dimensions)	Φxw (mm)	Φ150×54	
	3.5	Wheels,number front/rear(x=driven wheels)		1x+1/4	
	3.6	Tread, front	b ₁₀ (mm)	522	
	3.7	Tread, rear	b ₁₁ (mm)	390/505	
Dimensions	4.2	Lowered mast height	h ₁ (mm)	2308	2108
	4.3	Free Lift height	h ₂ (mm)	—	1520
	4.4	Lift height	h ₃ (mm)	3530	4530
	4.5	Extended maximal height	h ₄ (mm)	4080	5080
	4.6	Initial lift	h ₅ (mm)		120
	4.9	Height of tiller in drive position min./ max.	h ₁₄ (mm)		850/1385
	4.15	Height, lowered	h ₁₃ (mm)		90
	4.19	Overall length	l ₁ (mm)	1998	2042
	4.20	Length to face of forks	l ₂ (mm)	848	892
	4.21	Overall width	b ₁ (mm)		820
	4.22	Fork dimensions	s/e/l (mm)		60/180/1150
	4.25	Distance between fork-arms	b ₅ (mm)		570/685
	4.32	Ground clearance, centre of wheelbase	m ₂ (mm)		28
	4.33	Aisle width for pallets 1000X1200 crossways	A _{st} (mm)	2540 ²⁾	2584 ²⁾
	4.34	Aisle width for pallets 800X1200 lengthways	A _{st} (mm)	2512 ²⁾	2555 ²⁾
4.35	Turning radius	W _a (mm)	1667 ²⁾	1711 ²⁾	
Performance data	5.1	Travel speed, laden/ unladen	km/h	5.5/6.0	
	5.2	Lift speed, laden/ unladen	m/s	0.09/0.14	0.13/0.20
	5.3	Lowering speed, laden/ unladen	m/s	0.25/0.20	0.28/0.23
	5.8	Max. gradeability, laden/ unladen	%	6/12	
	5.10	Service brake		Electromagnetic	
Electric- engine	6.1	Drive motor rating S2 60min	kW	1.7	
	6.2	Lift motor rating at S3 4.5%	kW	1.5	3.2
	6.3	Battery acc. to DIN 43531/35/36 A, B, C, no		2VBS	3VBS
	6.4	Battery voltage, nominal capacity K5	V / Ah	24/180	24/270
	6.5	Battery weight +/-5%	kg	175	230
	6.6	Energy consumption acc: to VDI cycle	kWh/h	1.00	0.96
Additional data	8.1	Type of drive control		AC- speed control	
	8.4	Sound level at driver's ear acc. to EN 12053	dB(A)	<70	

- 1) when operate the fork and pallet at the same time: Load Capacity / rated load (mast lift) < Load Capacity / rated load (support arm lift)
2) Load section lowered: +72mm