

Telescopic Fork Mounted Jibs แบบปั้นจั่น






- Safety chain welded to boom has grab hooks for anchoring jib boom to forklift truck.
- Zinc plated fork heels pin for safe forklift attachment.
- Supplied complete with one safety swivel hook with bow shackle and one rigid hook.







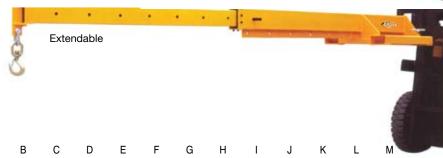

TFMJ-I	Length Positions ตำแหน่งความยาว	mm	740	969	1198	1427	1656	1885	2114	2352	2581	2810	3039	3268	3497
	Capacity น้ำหนักบรรทุก (3 Ton Forklift)	kg	3000	2291	1853	1556	1341	1178	1050	944	860	790	730	679	635
TFMJ	Length Positions ตำแหน่งความยาว	mm	755	986	1216	1446	1676	1906	2138	2367	2596	2825	3054	3283	3512
	Capacity น้ำหนักบรรทุก (3 Ton Forklift)	kg	3000	2300	1865	1568	1353	1190	1061	958	874	803	743	691	648

For work trucks of other capacities, adjust proportionately with maximum rated load at load centre subject to a maximum capacity of 3000 kg for this jib.





Forklift Maintenance Platform ถาดยกซ่อมบำรุง

- For overhead access & maintenance with safety.
- Spring loaded inward opening door with safety latch.
- Secured to the fork with heel pins & chain.
- Slip resistant floor with drainage holes.
- Conform to the UK's Health & Safety Guidance Notes PM28 & GN48.

Portable, foldable and yet, easy to assemble.

Castors available for easy transporting.









Model วุ่น		FMP30A	FMP30B	
Capacity น้ำหนักบรรทุก	kg	300	300	
Platform Size ขนาดถาดยก	mm	950 x 950	1200 x 1000	
Overall Height ความสูงทั้งหมด	mm	2180	2180	
Fork Spread ระยะหางช่องงายก	mm	600 / 690		



